SPECIFICATION

Temperature Range: -25°C ~ +85°C
Insulation Resistance: 1000MΩ Min
Dielectric Voltage: 1500V AC/minute

MATERIAL

Insulator: Nylon 66, UL94V-2

ORDER INFORMATION

5	H	5	0	3	0	F	X	-	2	0	2	W	B	L	0	0	A	0	1

- 503: Pitch 5.03mm
- F: Female
- 0: W/O Ear; 1: With Ear
- No. of contacts per row
- W: Natural
- B: Bag
- RoHS

certified Pb RoHS Compliant

AMTEK糧德
2021.01.04
Released DCC

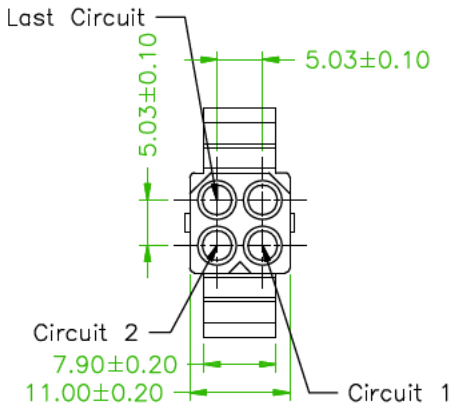



5H5030F1-202WBL00A01
2x2 Pin With Ear

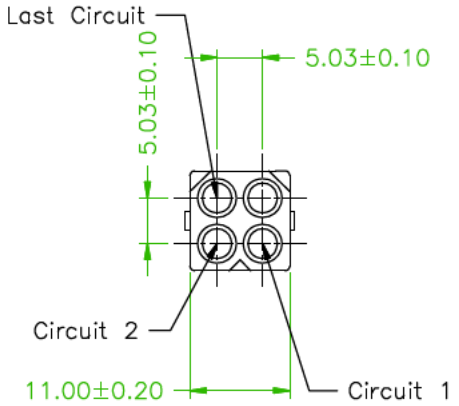



5H5030F0-202WBL00A01
2x2 Pin W/O Ear

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	5.03mm PITCH HOUSING			頁數 Page	1/1
品號 PART NO.	5H5030FX-202WBL00A01			繪圖 DRAWN	Benson 2020/01/16
圖號 DRAWING NO.	GW090-BS762	版本 REV.	A	核對 CHECKED	Josh 2020/01/16
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2020/01/16
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION	