

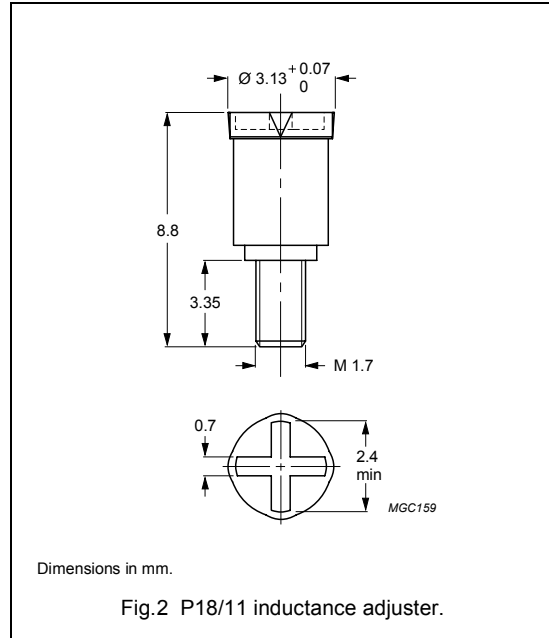
P cores and accessories

P18/11

INDUCTANCE ADJUSTERS

General data

ITEM	SPECIFICATION
Material of head and thread	polypropylene (PP), glass fibre reinforced
Maximum operating temperature	125 °C

Inductance adjuster selection chart ^{sup} (applies to all types)

GRADE	A _L (nH)	TYPES FOR LOW ADJUSTMENT	ΔL/L ⁽¹⁾	types for medium adjustment	ΔL/L ⁽¹⁾	TYPES FOR HIGH ADJUSTMENT	ΔL/L ⁽¹⁾
3H3	63	—	—	ADJ-P18-YELLOW	16	—	—
	100	—	—	—	—	ADJ-P18-BROWN	42
	160	ADJ-P18-YELLOW	9	ADJ-P18-RED	18	ADJ-P18-BROWN	28
	250	ADJ-P18-RED	11	ADJ-P18-WHITE	14	ADJ-P18-BROWN	18
	315	ADJ-P18-RED	8	ADJ-P18-BROWN	14	ADJ-P18-VIOLET	20
	400	ADJ-P18-WHITE	8	ADJ-P18-VIOLET	16	—	—
	630	ADJ-P18-VIOLET	8	—	—	—	—
	1000	ADJ-P18-VIOLET	5	—	—	—	—
	1250	—	—	—	—	—	—
3D3	40	—	—	—	—	ADJ-P18-YELLOW	19
	63	—	—	ADJ-P18-YELLOW	17	—	—
	100	—	—	—	—	ADJ-P18-RED	26
	160	—	—	ADJ-P18-RED	15	—	—

Note

1. Maximum adjustment range.