

SCSI D-SUB Right Angle Type




Specifications

Current Rate: 1 AMP
 Insulation Resistance: 500MΩ Min.
 Contact Resistance: 35mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -55°C to +105°C


Material

Insulator: Polyester, UL 94V-0
 ©Standard: PBT
 Terminal: Copper Alloy

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E
26	37.19	31.26	19.45	31.26	15.24
50	52.43	46.50	34.70	46.50	30.48
68	63.86	57.93	46.13	57.93	41.91

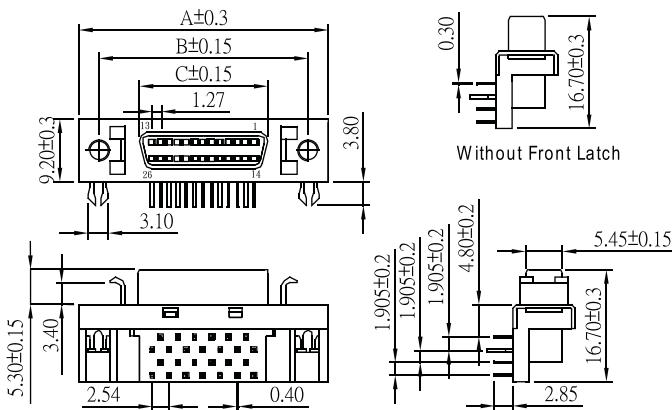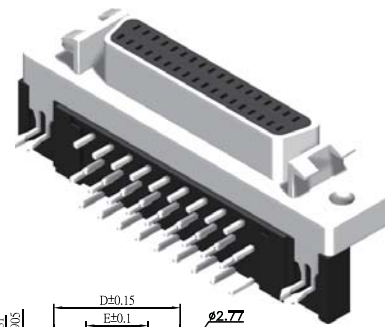


Recommended PCB Layout 26.50P (PCB TOLERANCE ±0.05)



Recommended PCB Layout 68P (PCB TOLERANCE ±0.05)

Order Information

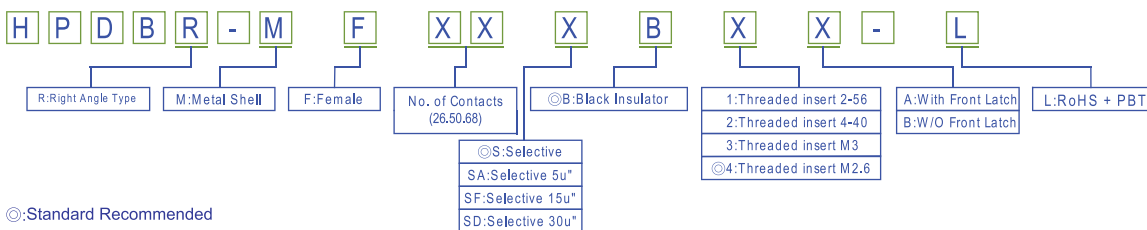

©: Standard Recommended


SCSI D-SUB Dual Port Right Angle Type

Specifications

Contact Current Rating: 1 Amperes
 Dielectric Withstanding Voltage: AC 500
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 35mΩ Max.
 Operation Temperature: -55°C to +85°C


Material

Terminal: Copper Alloy
 ©Insulator: PBT UL 94V-0 Rated.
 Bracket: Zinc Alloy, Grade 3

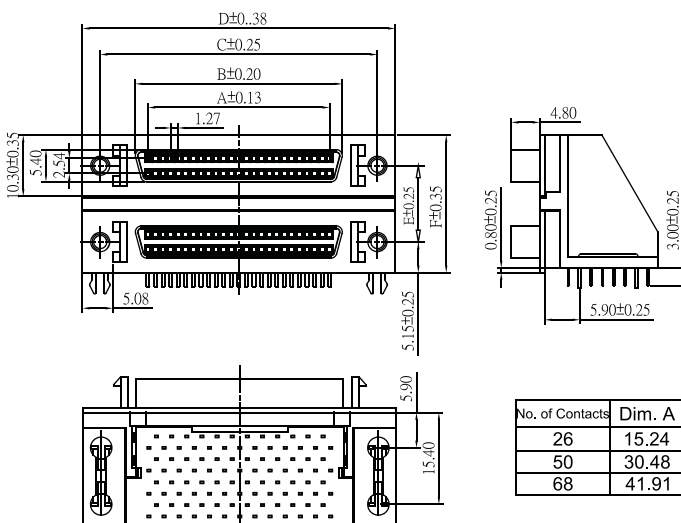

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F
26	15.24	19.46	31.24	37.21	12.80	23.10
50	30.48	34.70	46.48	52.45	15.24	25.45
68	41.91	46.13	57.91	63.88	19.05	29.35

Order Information

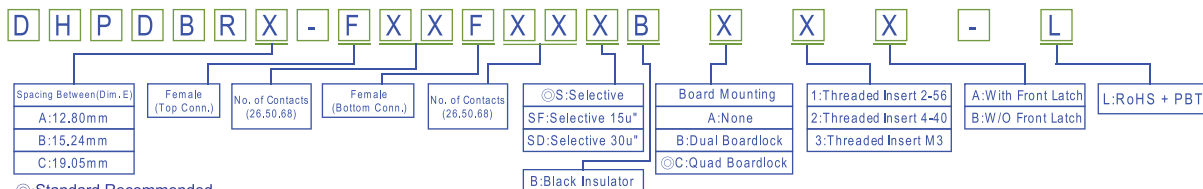

©: Standard Recommended