


## IDC Socket 2.0mm

**Specifications**  
 Current Rate: 1 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105°C

**Material**  
 Insulator: Polyester, UL 94V-0  
 © Standard: PBT  
 Terminal: Copper Alloy

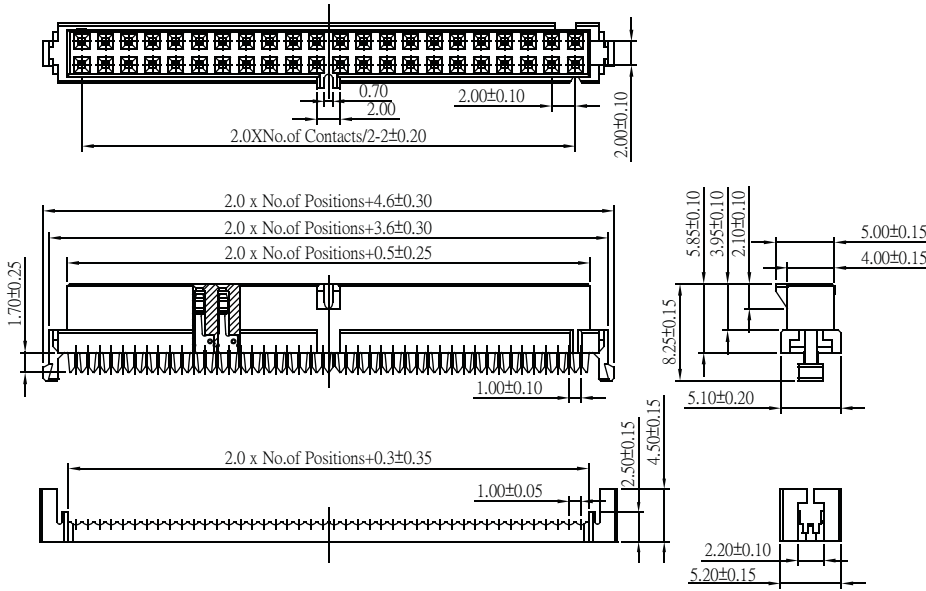


Part No.: IDC2A-XX-L

## IDC Socket 2.0mm

**Specifications**  
 Current Rate: 1 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105°C

**Material**  
 Insulator: Polyester, UL 94V-0  
 © Standard: PBT  
 Terminal: Copper Alloy

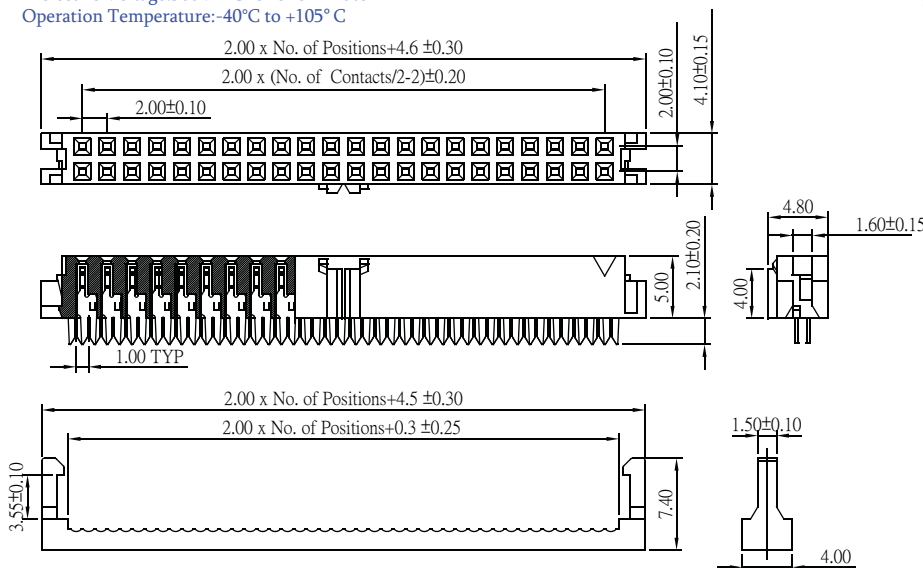

Part No.: IDC2B-XX-L

## ORDER INFORMATION

