


Jamicon Series : TU

Teapo Series : TC Low impedance · Long life Series




- Endurance: 105°C 6000~10000hours
- Recommended Applications : Applicable for AV(TV, Video, Audio), OA/HA/Communication, SMPS, Adapter, Monitor/Computer, Converter/Inverter
- Corresponding product to RoHS

**SPECIFICATIONS**

Item	Characteristics									
Category Temperature Range	-40 ~ +105°C									
Rated Voltage Range	6.3~100VDC									
Rated Capacitance Range	8.2 ~ 8200 µF									
Capacitance Tolerance	± 20 % (120Hz , 20°C)									
Leakage Current (20°C)	I=0.01CV or 3 µ A whichever is greater. (After rated voltage applied for 2 minutes) I : Max. leakage current (µ A), C : Nominal capacitance (µ F), V : Rated voltage (V)									
Dissipation Factor(MAX) (tan δ) (120Hz , 20°C)	WV	6.3	10	16	25	35	50	63	80	100
	tan δ	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08	0.08
When nominal capacitance is over 1000 µ F, tan δ shall be added 0.02 to the listed value with increase of every 1000 µ F.										
Low Temperature Stability Impedance Ratio (MAX)	WV	6.3	10	16	25	35	50	63	80	100
	Z(120Hz)									
	Z-25°C / Z+20°C	4	3	2	2	2	2	2	2	2
	Z-40°C / Z+20°C	8	6	4	3	3	3	3	3	3
Endurance	After applying rated voltage with rated ripple current for 6000~10000hours at 105°C, the capacitors shall meet the following requirements.									
	Capacitance change	Within ± 25% of initial value(6.3 · 10V : ± 30%)								
	D.F. (tan δ)	Not more than 200% of specified value								
	Leakage current	initial specified value or less								
	D Φ	5-6.3 Φ	8 Φ	10~18 Φ						
Life	6000hrs	8000hrs	10000hrs							
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.									

**Dimensions [mm]**

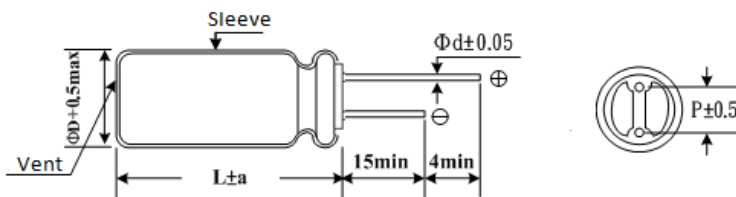

ΦD	5	6.3	8	10	13	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
a	1.5	1.5	1.5	1.5	2.0	2.0	2.0

**Multiplier for Ripple Current**

Freq. (Hz)	120	1K	10K	100K
8.2 ~ 33	0.42	0.70	0.90	1.00
47 ~ 270	0.50	0.73	0.92	1.00
330 ~ 680	0.55	0.77	0.94	1.00
820 ~ 1800	0.60	0.80	0.96	1.00
2200 ~ 8200	0.70	0.85	0.98	1.00

Jamicon Series : TU

Teapo Series : TC

■ STANDARD RATINGS

Rated Voltage (Surage Voltage) (V)	Cap (μF)	Case size Φ DxL(mm)	Ripple current (mA/rms105°C) (100KHz)	Impedance (Ω,20°C) (100KHz)	Rated Voltage (Surage Voltage) (V)	Cap (μF)	Case size Φ DxL(mm)	Ripple current (mA/rms105°C) (100KHz)	Impedance (Ω,20°C) (100KHz)
6.3V (8)	220	5x11	345	0.242	35V (44)	220	8x12	945	0.060
	470	6.3x11	540	0.103		270	8x16	1250	0.050
	820	8x12	945	0.062		330	10x12.5	1330	0.041
	1200	8x16	1250	0.050		390	8x20	1500	0.032
		10X12.5	1330	0.043		470	10x16	1760	0.030
	1500	8x20	1500	0.032		560	10x20	1960	0.025
	1800	10x16	1760	0.031		680	10x25	2250	0.023
	2200	10x20	1960	0.022		1000	13x20	2480	0.025
	2700	10x25	2250	0.020		1200	13x25	2900	0.022
	3900	13x20	2480	0.019		1500	13x30	3450	0.018
	4700	13x25	2900	0.017			16x20	3250	0.020
	5600	13x30	3450	0.014		1800	13x35	3570	0.018
	6800	16x20	3250	0.017		2200	16x25	3630	0.015
		13x35	3570	0.013					
8200	16x25	3630	0.014						
10V (13)	150	5x11	345	0.242	50V (63)	27	5x11	238	0.340
	330	6.3x11	540	0.103		56	6.3x11	385	0.140
	680	8x12	945	0.062		100	8x12	724	0.074
	1000	8x16	1250	0.050		120	8x16	950	0.061
		10x12.5	1330	0.043		150	10x12.5	979	0.061
	1500	8x20	1500	0.032		180	8x20	1190	0.046
		10x16	1760	0.031		220	10x16	1370	0.042
	1800	10x20	1960	0.022		270	10x20	1580	0.030
	2200	10x25	2250	0.020		330	10x25	1870	0.028
	3300	13x20	2480	0.019		470	13x20	2050	0.027
	3900	13x25	2900	0.017		560	13x25	2410	0.023
	4700	13x30	3450	0.014		680	13x30	2860	0.021
		16x20	3250	0.017		820	13x35	2960	0.019
	5600	13x35	3570	0.013			16x20	2730	0.023
6800	16x25	3630	0.014	1000	16x25	3010	0.021		
16V (20)	100	5x11	345	0.242	63V (79)	18	5x11	173	1.000
	220	6.3x11	540	0.103		47	6.3x11	278	0.560
	470	8x12	945	0.062		82	8x12	525	0.264
	680	8x16	1250	0.050		100	8x16	688	0.192
		10x12.5	1330	0.043		120	10x12.5	725	0.180
	1000	8x20	1500	0.032		150	8x20	861	0.144
		10x16	1760	0.031		180	10x16	998	0.132
	1500	10x20	1960	0.025		270	10x20	1200	0.094
	1800	10x25	2250	0.025			13x16	1200	0.098
	2200	13x20	2480	0.025		330	10x25	1410	0.083
	2700	13x25	2900	0.022		390	13x20	1570	0.072
	3300	13x30	3450	0.018		470	13x25	1990	0.052
		16x20	3250	0.020		560	13x30	2410	0.042
	3900	13x35	3570	0.017			16x20	2100	0.052
4700	16x25	3630	0.018	680	13x35	2620	0.040		
25V (32)	68	5x11	345	0.242	80V (100)	820	13x40	2940	0.032
	150	6.3x11	540	0.103			16x25	2730	0.038
	330	8x12	945	0.062		18x20	2500	0.046	
	390	8x16	1250	0.050			1200	16x32	2990
	470	10x12.5	1330	0.043		18x25		2800	0.037
	560	8x20	1500	0.032		1500	16x36	3040	0.025
	680	10x16	1760	0.031			18x32	3300	0.030
	820	10x20	1960	0.025		1800	16x40	3570	0.023
	1000	10x25	2250	0.022			18x36	3570	0.024
	1500	13x20	2480	0.021		2200	18x40	3670	0.022
	1800	13x25	2900	0.020			12	5x11	163
	2200	13x30	3450	0.016		33	6.3x11	267	0.570
		16x20	3250	0.019		56	8x12	462	0.360
	2700	13x35	3570	0.015		68	8x16	585	0.250
3300	16x25	3630	0.016	82	10x12.5	624	0.230		
35V (44)	47	5x11	345	0.220	100	8x20	735	0.190	
	100	6.3x11	540	0.094	120	10x16	780	0.170	
					180	10x20	1040	0.120	
						13x16	975	0.130	

Jamicon Series : TU

Teapo Series : TC

■ STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap ( $\mu$ F)	Case size $\Phi$ D $\times$ L(mm)	Ripple current (mA/rms105°C) (100KHz)	Impedance ( $\Omega$ ,20°C) (100KHz)
80V (100)	220	10x25	1170	0.110
	270	13x20	1430	0.085
	330	13x25	1620	0.060
	390	13x30	1950	0.051
		16x20	1750	0.058
	470	13x35	2140	0.043
	560	13x40	2340	0.036
		16x25	2210	0.044
		18x20	1950	0.054
	680	16x32	2400	0.033
	820	16x36	2600	0.029
		18x25	2270	0.038
	1000	16x40	2860	0.027
		18x32	2470	0.031
1200	18x36	2860	0.027	
1500	18x40	3510	0.026	
100V (125)	8.2	5x11	163	1.400
	18	6.3x11	267	0.570
	33	8x12	462	0.360
	47	8x16	585	0.250
	56	10x12.5	624	0.230

Rated Voltage (SurageVoltage) (V)	Cap ( $\mu$ F)	Case size $\Phi$ D $\times$ L(mm)	Ripple current (mA/rms105°C) (100KHz)	Impedance ( $\Omega$ ,20°C) (100KHz)
100V (125)	68	8x20	735	0.190
	82	10x16	780	0.170
	100	10x20	1040	0.120
		13x16	975	0.130
	120	10x25	1170	0.110
	150	13x20	1430	0.085
	220	13x25	1620	0.060
	270	13x30	1950	0.051
		16x20	1750	0.058
	330	13x35	2140	0.043
	390	13x40	2340	0.036
		16x25	2210	0.044
		18x20	1950	0.054
	470	16x32	2400	0.033
		18x25	2270	0.038
	560	16x36	2600	0.029
		18x32	2470	0.031
	680	16x40	2860	0.027
		18x36	2860	0.027
	820	18x40	3510	0.026