

Waterproof D-SUB H.D. Solder Type




Specifications

Current Rate: 5 AMP
 Insulation Resistance: 5000MΩ Min.
 Contact Resistance: 10mΩ Max.
 Dielectric Voltage: AC 300V /ram 50Hz
 Operation Temperature: -55°C to +85°C


Material

Terminal: Copper Alloy.
 Insulator: PBT

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D
15	39.40	24.99	16.92	16.33
26	47.70	33.30	25.25	24.66
44	64.50	47.04	38.96	38.38

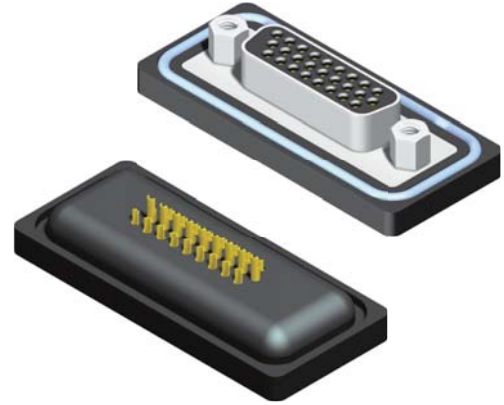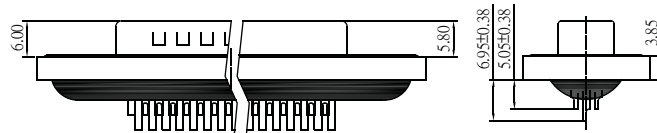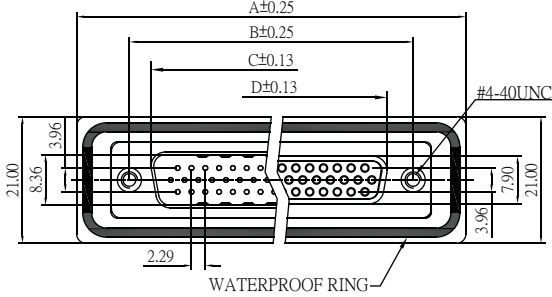

Order Information

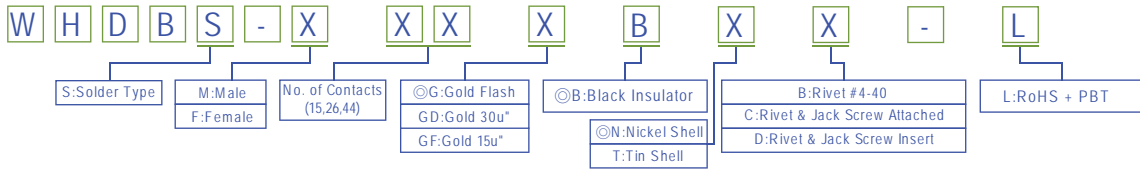

Type See Page 5-1

D-SUB Machine Pin Right Angle Type




Specifications

Current Rate: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -55°C to +105°C


Material

Insulator: Polyester, UL 94V-0
 Standard: PBT
 Terminal: Copper Alloy.

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim F
9	30.81	24.99	16.33	11.08	19.20	2.54
15	39.14	33.32	24.66	19.39	27.70	2.54
25	53.04	47.04	38.38	33.24	41.10	2.84
37	69.32	63.50	54.84	49.86	57.30	2.84

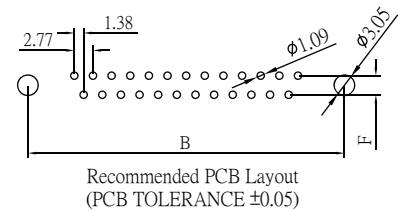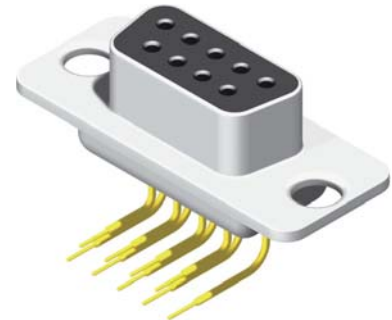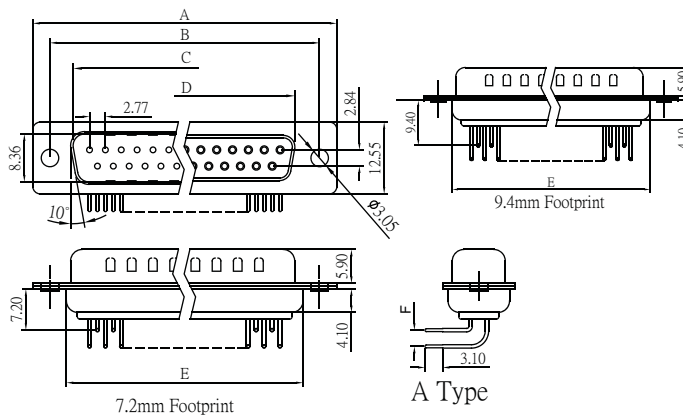

Order Information

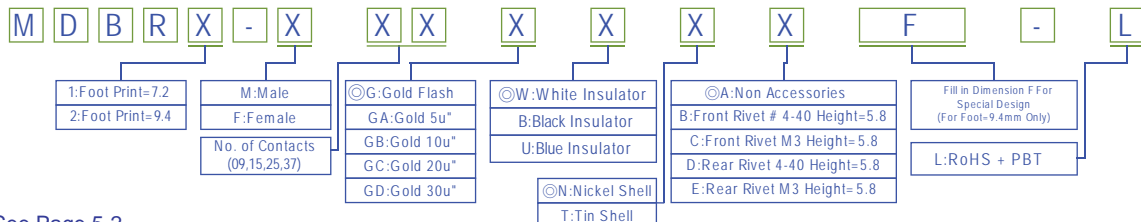

Type See Page 5-2

D-SUB High Density



ROHS