

OLED DISPLAY SPECIFICATION



RAYSTAR Optronics, Inc.
曜凌光電股份有限公司



曜凌光電股份有限公司

Raystar Optronics, Inc.

T: +886-4-2565-0761 | F: +886-4-2565-0760

sales@raystar-optronics.com | www.raystar-optronics.com

SPECIFICATION

Model No:
REA009616B

General Specification



The Features is described as follow:

- Module dimension: 30.0 x 10.0 x 4.71(Max) mm
- Active area: 17.26 x 3.18 mm
- Dot Matrix: 96 x 16
- Dot size: 0.16 x 0.18 mm
- Dot pitch: 0.18 x 0.20 mm
- Display Mode: Passive Matrix
- Duty: 1/16 Duty
- Display Color: Monochrome
- IC: SSD1306
- Interface: I2C
- SIZE: 0.69 inch



Interface Pin Function

No.	Symbol	Function
1	GND	This is a ground pin.
2	VDD	2.8 ~ 3.3V Power supply pin for core logic operation.
3	SCL	The serial clock input
4	SDA	The serial data input/output

Contour Drawing & Block Diagram

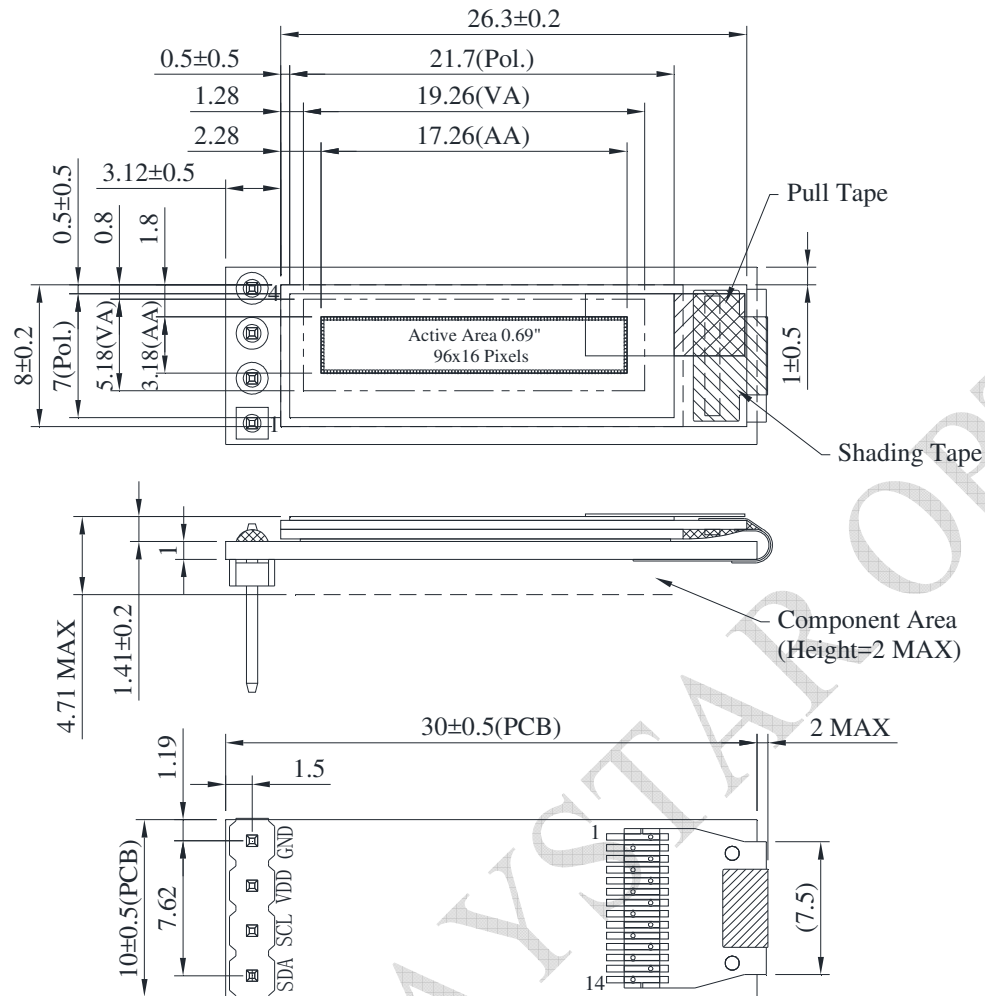

PIN	SYMBOL
1	GND
2	VDD
3	SCL
4	SDA

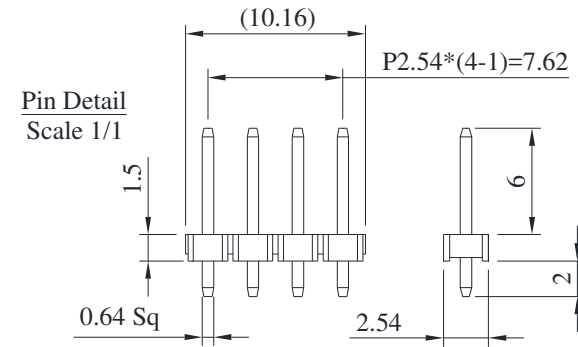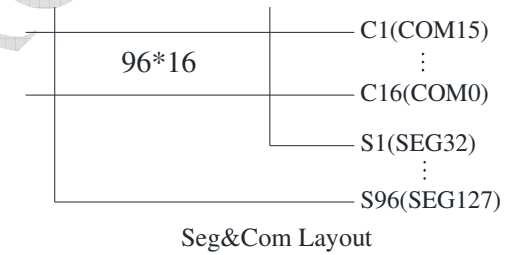

The non-specified tolerance of dimension is ± 0.3 mm.

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Supply Voltage for Logic	VDD	0	4.0	V
Operating Temperature	TOP	-30	+70	°C
Storage Temperature	TSTG	-30	+70	°C

Electrical Characteristics

DC Electrical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage for Logic	VDD	—	2.8	3.0	3.3	V
Input High Volt.	VIH	—	0.8×VDD	—	VDD	V
Input Low Volt.	VIL	—	0	—	0.2×VDD	V
Output High Volt.	VOH	—	0.9×VDD	—	VDD	V
Output Low Volt.	VOL	—	0	—	0.1×VDD	V
Display 50% Pixel on	IDD	—	—	4	8	mA