OLED DISPLAY SPECIFICATION



RAYSTAR Optronics, Inc.
曜凌光電股份有限公司

曜凌光電股份有限公司
Raystar Optronics, Inc.
T: +886-4-2565-0761 | F: +886-4-2565-0760
sales@raystar-optronics.com | www.raystar-optronics.com

REX128128G
SPECIFICATION

General Specification

The Features is described as follow:

- Module dimension: 25.9 × 30.1 × 1.26 mm
- Active area: 20.076 × 20.076 mm
- Dot Matrix: 128*128
- Pixel size: 0.137 × 0.137 mm
- Pixel pitch: 0.157 × 0.157 mm
- Display Mode：Passive Matrix
- Duty: 1/128 Duty
- Display Color: Monochrome
- IC: SH1107
- Interface: 6800,8080,4-Wire SPI,I2C
- SIZE:1.12 inch

RAYSTAR OPTRONICS

Interface Pin Function


<table>
<tr><th>No.</th><th>Symbol</th><th>Function</th></tr>
<tr><td>1</td><td>VPP</td><td>This is the most positive voltage supply pad of the chip.
It should be supplied externally.</td></tr>
<tr><td>2</td><td>VCOMH</td><td>This is a pad for the voltage output high level for common signals.
A capacitor should be connected between this pad and VSS.</td></tr>
<tr><td>3</td><td>VDD</td><td>Power supply for logic and input.</td></tr>
<tr><td>4</td><td>NC</td><td>Not connected.</td></tr>
<tr><td>5</td><td>IM1</td><td rowspan="2">These are the MPU interface mode select pads.
<table>
<tr><th></th><th>8080</th><th>I2C</th><th>6800</th><th>4SPI</th></tr>
<tr><td>IM1</td><td>1</td><td>1</td><td>0</td><td>0</td></tr>
<tr><td>IM2</td><td>1</td><td>0</td><td>1</td><td>0</td></tr>
</table></td></tr>
<tr><td>6</td><td>IM2</td></tr>
<tr><td>7</td><td>IREF</td><td>This is a segment current reference pad. A resistor should be connected between this pad and VSS. Set the current at 15.625mA.</td></tr>
<tr><td>8</td><td>CS</td><td>This pad is the chip select input. When CS = “L”, then the chip select becomes active, and data/command I/O is enabled.</td></tr>
<tr><td>9</td><td>RES</td><td>This is a reset signal input pad. When RES is set to “L”, the settings are initialized. The reset operation is performed by the RES signal level.</td></tr>
<tr><td>10</td><td>A0</td><td>This is the Data/Command control pad that determines whether the data bits are data or a command.
A0 = “H”: the inputs at D0 to D7 are treated as display data.
A0 = “L”: the inputs at D0 to D7 are transferred to the command registers.
In I2C interface, this pad serves as SA0 to distinguish the different address of OLED driver.</td></tr>
<tr><td>11</td><td>WR</td><td>This is a MPU interface input pad.
When connected to an 8080 MPU, this is active LOW. This pad connects to the 8080 MPU WR signal. The signals on the data bus are latched at the rising edge of the WR signal. When connected to a 6800 Series MPU: This is the read/write control signal input terminal.
When WR = “H”: Read. When WR = “L”: Write.</td></tr>
<tr><td>12</td><td>E/RD</td><td>This is a MPU interface input pad.
When connected to an 8080 series MPU, it is active LOW. This pad is connected to the RD signal of the 8080 series MPU, and the data bus is in an output status when this signal is “L”.
When connected to a 6800 series MPU, this is active HIGH. This is used as an enable clock input of the 6800 series MPU.</td></tr>
</table>


RAYSTAR OPTRONICS


13~20	D0~D7	This is an 8-bit bi-directional data bus that connects to an 8-bit or 16-bit standard MPU data bus. When the serial interface is selected, then D0 serves as the serial clock input pad (SCL) and D1serves as the serial data input pad (SI). At this time, D2 to D7 are set to high impedance. When the I2C interface is selected, then D0 serves as the serial clock input pad (SCL) and D1 serves as the serial data input pad (SDA). At this time, D2 to D7 are set to high impedance.
21	GND	Ground
22	NC	Not connected.


RAYSTAR OPTRONICS

Contour Drawing & Block Diagram

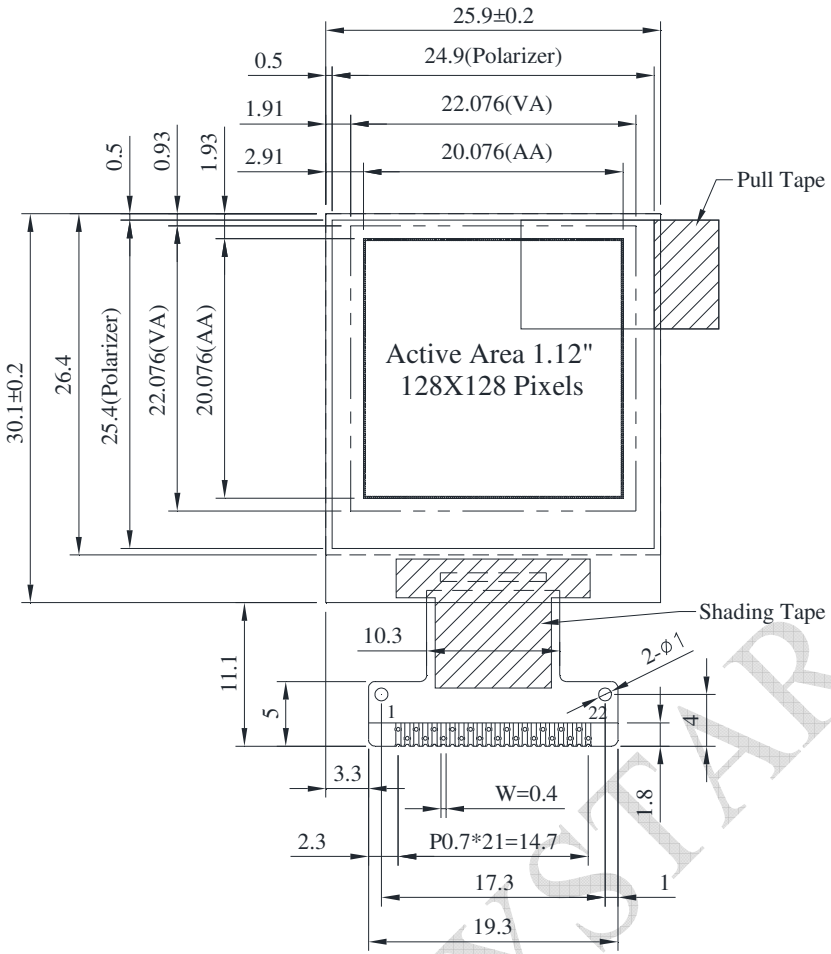

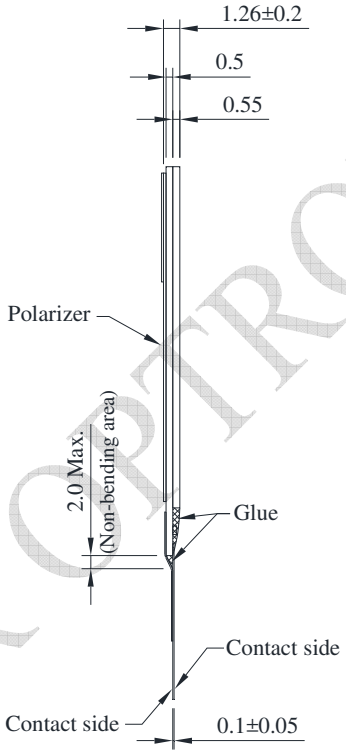



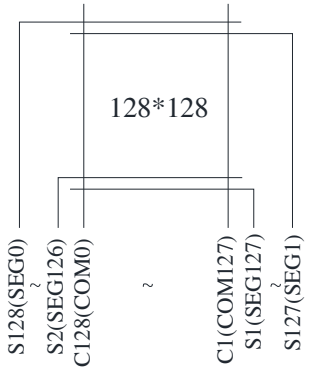

PIN	SYMBOL
1	VPP
2	VCOMH
3	VDD
4	NC
5	IM1
6	IM2
7	IREF
8	CS
9	RES
10	A0
11	WR
12	E/RD
13	D0
14	D1
15	D2
16	D3
17	D4
18	D5
19	D6
20	D7
21	GND
22	NC

The non-specified tolerance of dimension is ±0.3 mm .

RAYSTAR OPTRONICS

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Supply Voltage for Logic	VDD	-0.3	3.6	V
Supply Voltage for Display	VPP	-0.3	17.0	V
Operating Temperature	TOP	-40	+80	°C
Storage Temperature	TSTG	-40	+85	°C

Electrical Characteristics

DC Electrical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage for Logic	VDD	—	1.65	3.0	3.3	V
Supply Voltage for Display	VPP	—	7.0	12.0	12.5	V
Input High Volt.	VIH	—	0.8×VDD	—	VDD	V
Input Low Volt.	VIL	—	0	—	0.2×VDD	V
Output High Volt.	VOH	—	0.8×VDD	—	VDD	V
Output Low Volt.	VOL	—	0	—	0.2×VDD	V
50% Checkerboard operating Current	IPP	VPP=12V	—	15.0	25.0	mA

RAYSTAR OPTRONICS