

Waterproof D-SUB H.D. Right Angle Type




Specifications

Current Rate: 5 AMP
 Insulation Resistance: 5000MΩ Min.
 Contact Resistance: 10mΩ Max.
 Dielectric Voltage: AC 300V / 50Hz
 Operation Temperature: -55°C to +85°C

Material

Terminal: Copper Alloy.
 Insulator: PBT

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	Dim. F
15	39.40	24.99	16.92	16.33	0.25
26	47.70	33.30	25.25	24.66	0.51
44	64.50	47.04	38.96	38.38	0.51

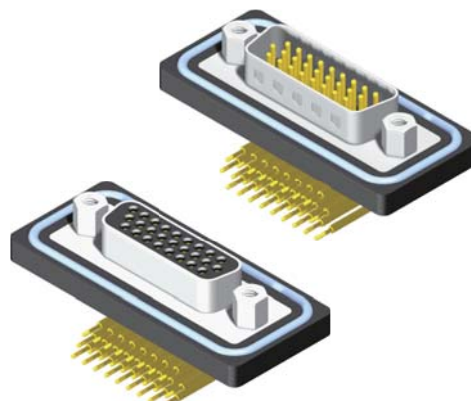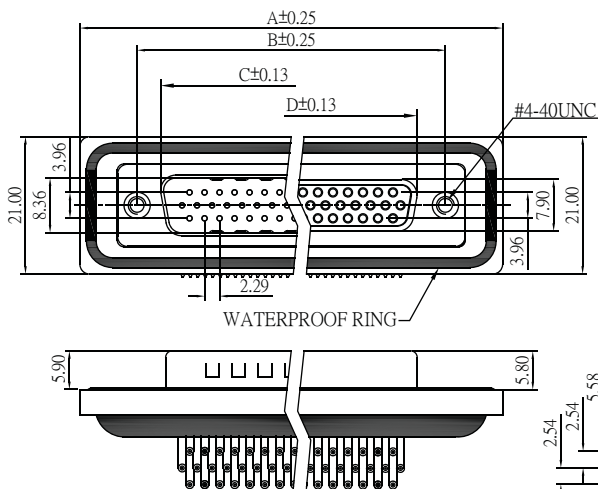

Waterproof D-SUB H.D. Dip Type




Specifications

Current Rate: 5 AMP
 Insulation Resistance: 5000MΩ Min.
 Contact Resistance: 10mΩ Max.
 Dielectric Voltage: AC 300V / 50Hz
 Operation Temperature: -55°C to +85°C


Material

Terminal: Copper Alloy.
 Insulator: PBT

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	Dim. F
15	39.40	24.99	16.92	16.33	0.25
26	47.70	33.30	25.25	24.66	0.51
44	64.50	47.04	38.96	38.38	0.51

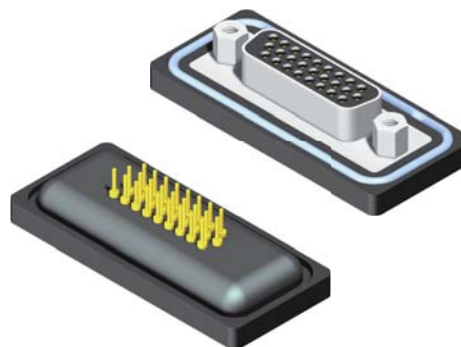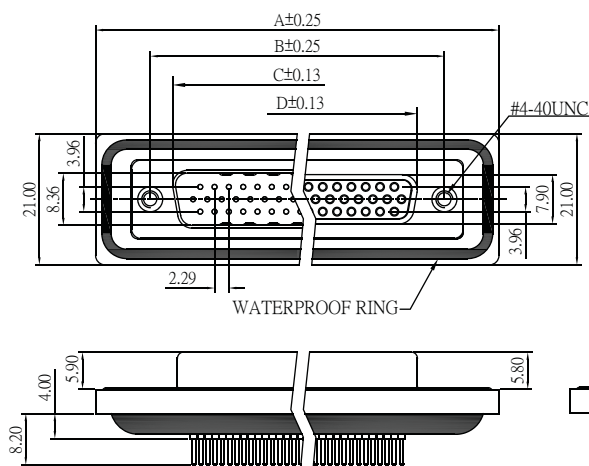

ORDER INFORMATION

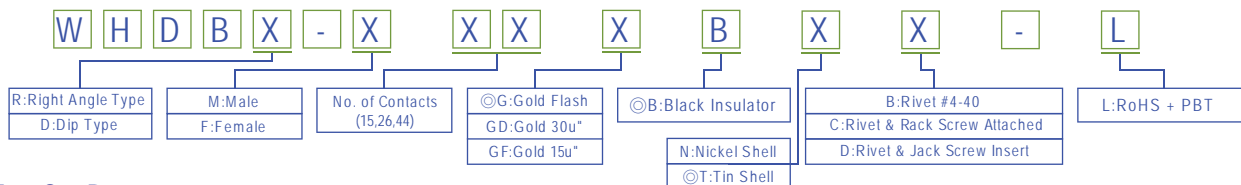

Type See Page 5-1