

# ADSL CENTRAL OFFICE POTS SPLITTER ADSL-205,213 SERIES

## FEATURES:

- Excellent Longitudinal Balance
- DC Current up to 100mA

## OPTIONS:

- Bulk Packaging is Standard
- Custom design available
- SMT Available

## COMMON APPLICATIONS:

- ADSL Central Office
- POTS Filter

## STANDARD SPECIFICATIONS

Part Number	Turns Ratio	OCL (mH)	DCR ( $\Omega$ Max)	Schematic	Package
ADSL-205	1CT:1	4.0 $\pm$ 5%	3.00	1	A
ADSL-206	1CT:1	3.0 $\pm$ 5%	2.50	1	A
ADSL-207	1CT:1	2.25 $\pm$ 10%	2.25	1	A
ADSL-208	1CT:1	1.425 $\pm$ 10%	2.25	1	A
ADSL-209	1CT:1	1.65 $\pm$ 10%	2.25	1	A
ADSL-210	1CT:1	1.35 $\pm$ 10%	2.25	1	A
ADSL-211	1:1	4.0 $\pm$ 5%	3.00	2	B
ADSL-212	1:1	10.0 $\pm$ 5%	5.00	2	B
ADSL-213	1:1:1:1	0.6 $\pm$ 5%	2.00	3	B

Note: 1. K =  $\pm$  10%, M =  $\pm$  20%




## TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS

- Soldering methods: Wave, Reflow
- Operating Temperature: 0°C to 70°C
- Storage Temperature: -55°C to 125°C

Note: All specifications subject to change without notice.

Hipot: 1500VRMS.

Inductance Measured at 1KHz, 100mA

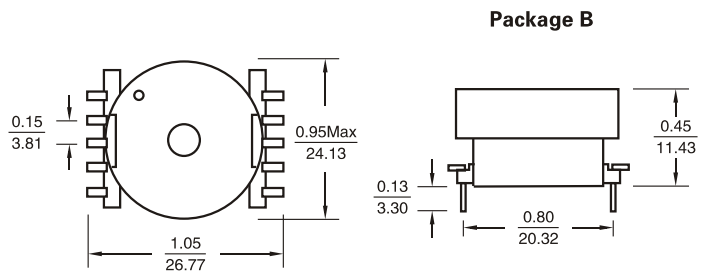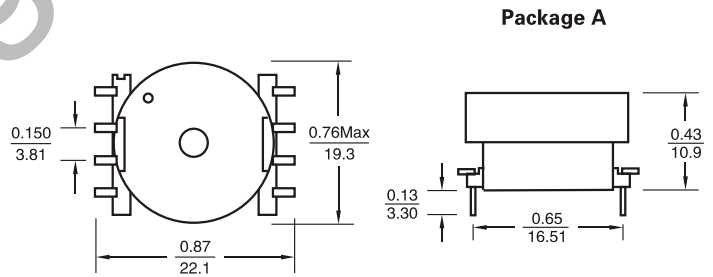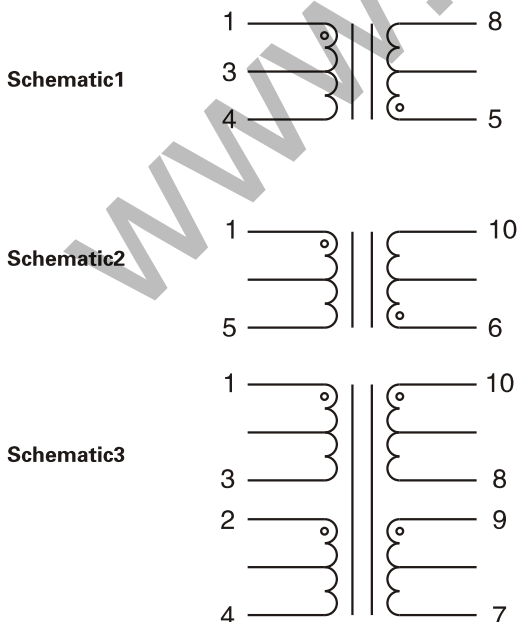

Dimensions: Inches (mm)